

# FINGER PROTECTION DEVICES

## FP200

### Application

- Suitable for most single and double action doors including automatic doors
- Roller system finger protection.

### Description

- Provides effective protection against fingers being accidentally trapped on the hinge side of the door
- Strong fire retardant fabric material is kept under constant tension and is designed to cover the gap between the door and frame automatically when the door is opened
- Features an easy clean aluminium housing

### Technical Data


Roller system specifications:

- Cycle tested to 1,000,000 operations
- Maximum length: 2500mm
- Standard length: 1925mm
- Minimum length: 325mm
- Maximum fabric travel: 260mm
- Suitable for use on 60min fire doors
- Class 2 - BS 8613:2017 Finger Protection for Pedestrian Doors
- EN16654:2015 Child Protection Products


## FP200X

- Standard length: 2015mm
- EN16005 compliant for automatic doors
- Maximum fabric travel: 260mm

### Application

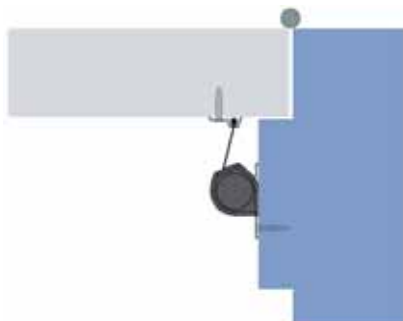

### Dimensions

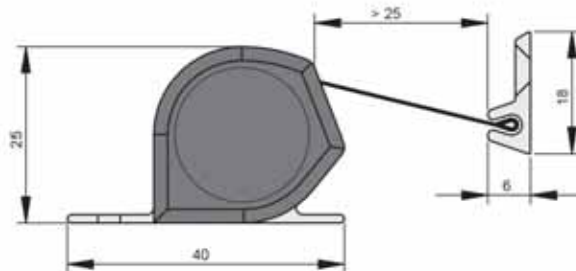

### Fabric colour



Black

### Housing finish options



White (RAL 9016)



Satin Anodised Aluminium (SAA)



Dark Bronze Anodised (DBA)

RAL colour match available on request (POA). Please contact us to enquire.

Awarded German Safety Mark and certified to EN16654

